



 **GRAVELY®**

PRO SERIES

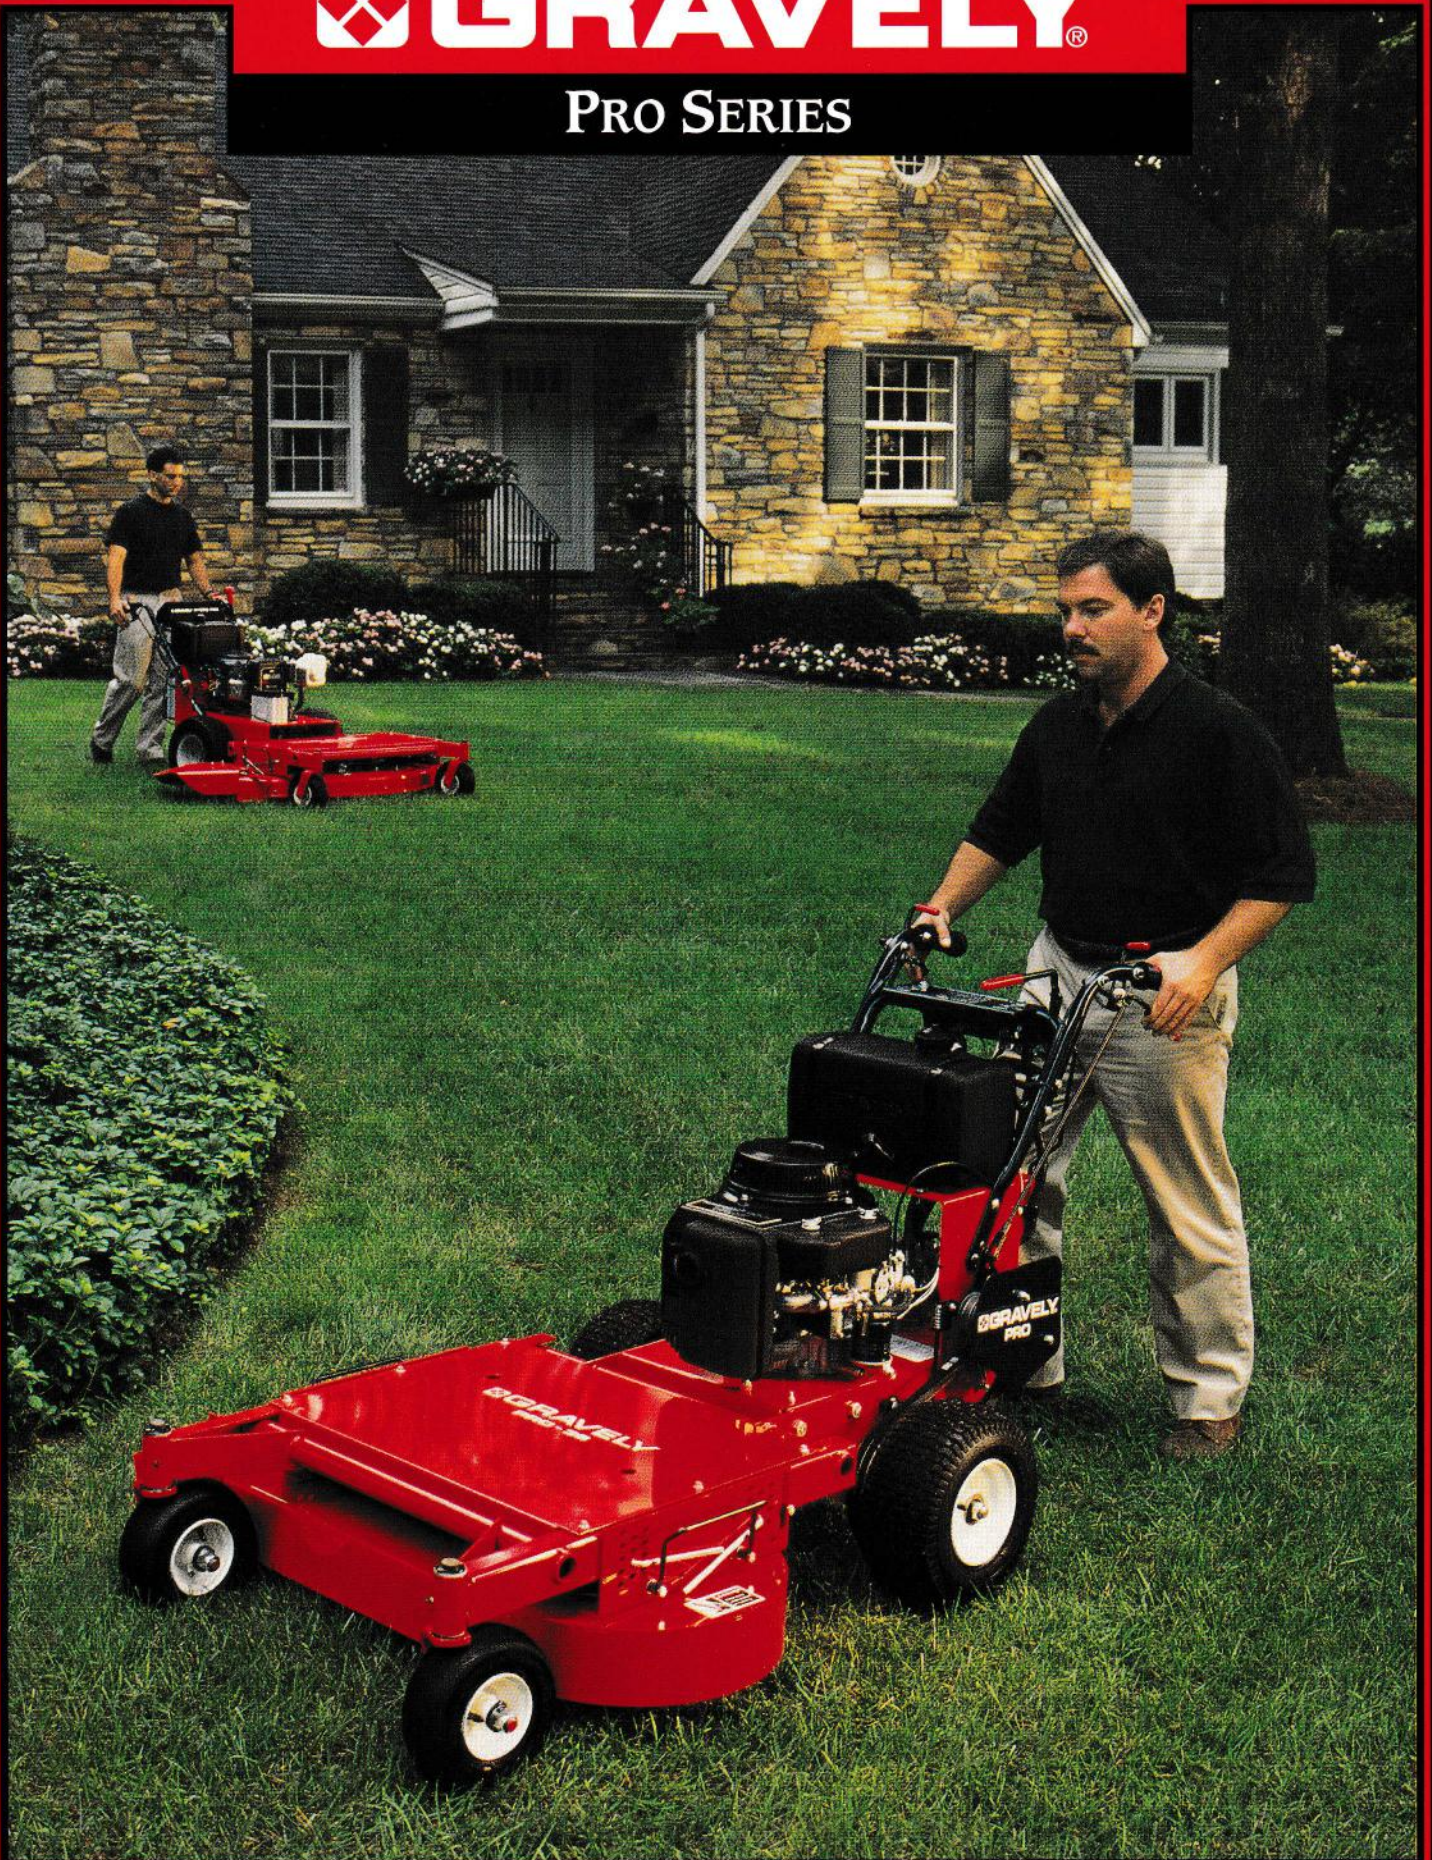

GRAVELY
PRO 150 SERIES

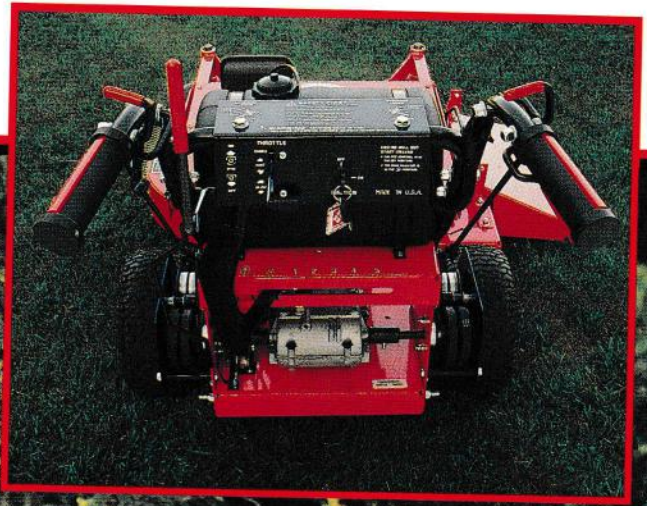

Pro 150/50" Mower

With many of the same features of the larger commercial mowers, the Gravely Pro 150 Series is not only more economical, it's smaller, lighter, and easier to use. It utilizes a five-speed, all-gear transmission to muscle through any situation and deliver uncompromising power in the tightest turns. Drizzle, downpour, or deluge, with Gravely you always have all the elements of success.

***2-YEAR COMMERCIAL
WARRANTY**
Details on request.



Meets ANSI specifications
B71.4-1990.

1. **Five-Speed, All-Gear Transmission** provides a speed range for different mowing conditions.
2. **Fast Forward/Reverse** gives you precise control and greater maneuverability in tight spots.
3. **Single-Idler Wheel Drive** for easier reverse operation.
4. **Wide Wheel Spacing** gives better stability on hills.
5. **Interlock System** prevents engine from being started with either mower or transmission engaged. Complies with safety standards.
6. **Deck Height** is easily adjustable from 1" to 4" (2.5 to 10 cm) in 1/4" (0.64 cm) increments. No tools required for adjustments.
7. **Mower Belt Clutch** for low cost maintenance and simple operation.
8. **Large Front Pneumatic Caster Wheels** provide longer life and absorb shock.
9. **Big 3.5 Gallon Gas Tank** means long running time between stops.
10. **Operator Presence Controls** allow mowing only when operator is in position. Allows one-hand operation for hillsides and quick tight turns. Individual Micro-switches on each handlebar allow continuous operation if one switch fails.
11. **Two Individual Drive Belts** on each side prevent slippage in wet conditions. Spacing between belts prevents grass build-up.
12. **1" Mower Spindles** are greaseable from top of mower. Tapered roller bearings. Cast-iron housing.

GRAVELY®

PRO 200 SERIES

Hour after hour of heavy-duty use, the Pro 200 Series withstands it all. There's no freewheeling down hills thanks to a double-idler pulley design. And time and money are saved due to the unique PTO system where a main deck drive is engaged by a smaller belt drive instead of a main belt.


The Pro 200 uses only the best in tapered roller bearings and full one-inch spindles with cast-iron spindle housings for a long, productive life and easy maintenance. This Gravely durability means less downtime which, in turn, means more lawns mowed. So wouldn't *you* rather depend on a Gravely?



Pro 200/50" Mower




Pro 200/40" Mower/Grass Catcher

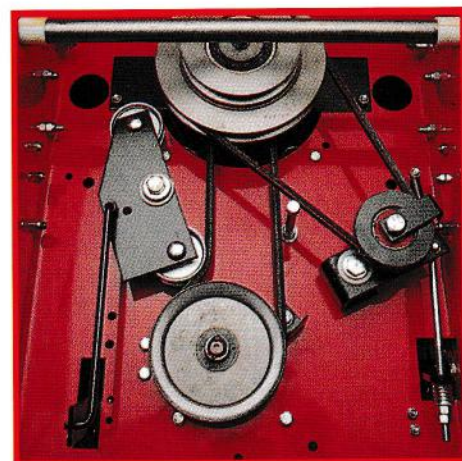

Mechanical PTO clutch requires less maintenance and provides longer life.

***2-YEAR COMMERCIAL
WARRANTY**
Details on request.

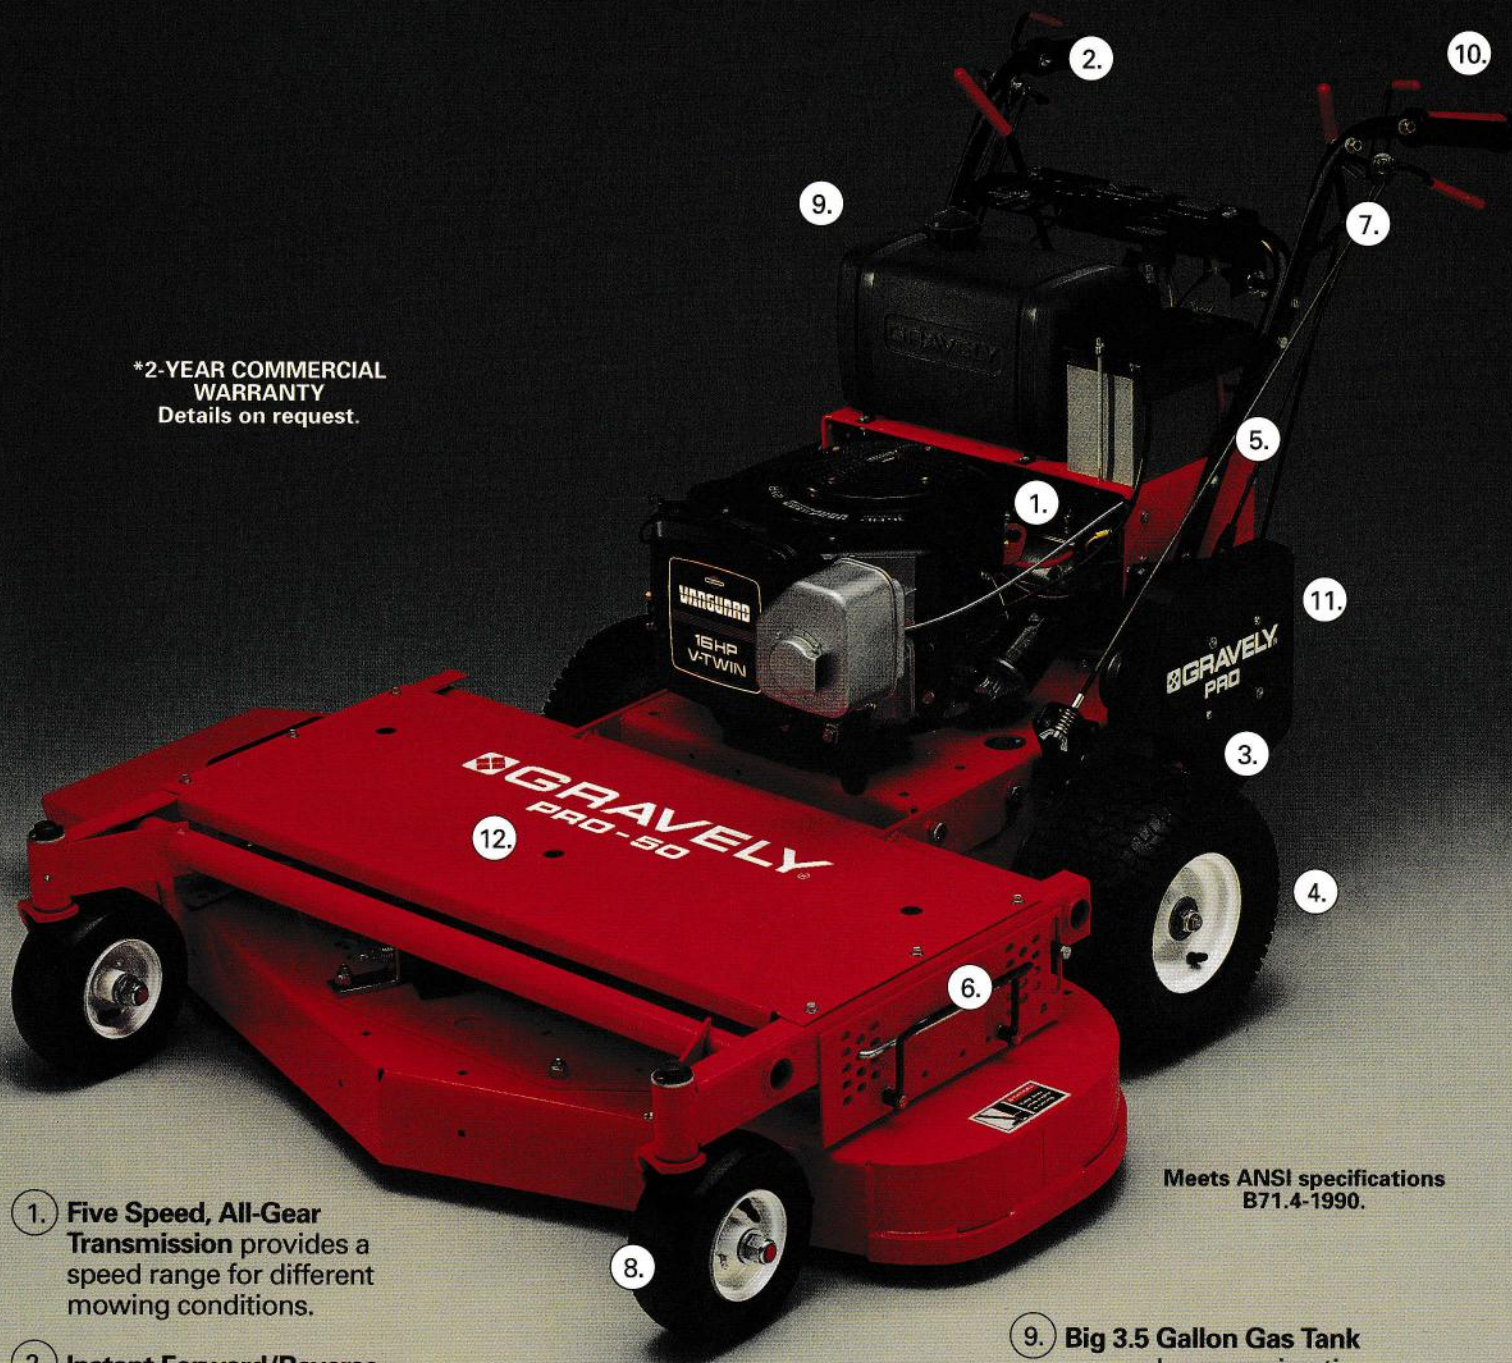

Meets ANSI specifications
B71.4-1990.

1. **Five Speed, All-Gear Transmission** provides a speed range for different mowing conditions.

2. **Instant Forward/Reverse** gives you precise control and greater maneuverability in tight spots.

3. **Double-Idler Wheel Drive** prevents downhill free-wheeling.

4. **Wide Wheel Spacing** gives better stability on hills.

5. **Interlock System** prevents engine from being started with either mower or transmission engaged. Reverse control must be continuously engaged for operation. Complies with safety standards.

6. **Deck Height** is easily adjustable from 1" to 4" (2.5 to 10 cm) in 1/4" (0.64 cm) increments. No tools required for adjustments.

7. **Mechanical PTO Clutch** requires less maintenance and provides longer life. V-belt clutching element easily replaced.

8. **Large Front Pneumatic Caster Wheels** provide longer life and absorb shock.

9. **Big 3.5 Gallon Gas Tank** means long running time between stops.

10. **Operator Presence Controls** allow mowing only when operator is in position. Allows one-hand operation for hillsides and quick tight turns.

11. **Two Individual Drive Belts** on each side prevent slippage in wet conditions. Spacing between belts prevents grass build-up.

12. **1" Mower Spindles** are greaseable from top of mower. Tapered roller bearings. Cast-iron housing.

GRAVELY®

PRO 300 SERIES


Simply put, the Gravelly Pro 300 Series is the best. With the finest engineering and only the best quality parts, your mowing jobs are made easier and hassle-free. And by cutting down on service and training time, you'll complete more jobs each day.

The Pro 300 is easy to operate with its specially designed hand controls. With two independent pumps, you get zero-turning radius for greater maneuverability.

You'll also take advantage of the latest in hydrostatic transmission benefits along with Gravelly's unique PTO system. So simple, so successful, so Gravelly.



Pro 300/50" Mower


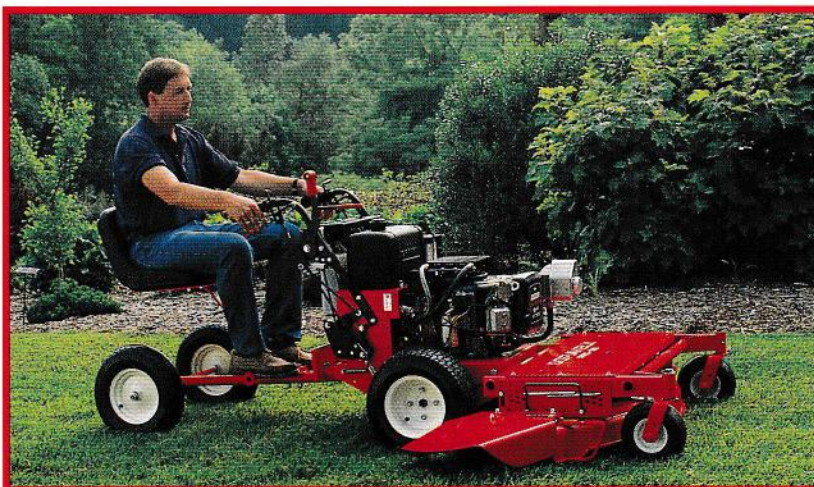


Pro 300/50" Mower/Sulky



Pro 300/40" Mower/Grass Catcher

Independent hydrostatic motors feature cast-iron housings for durability.

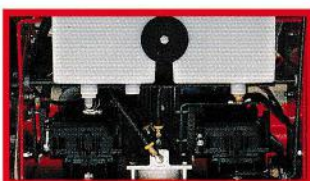

Two independent Sundstrand variable displacement pumps provide infinite variable speeds and individual wheel control.



Instrument panel is located in full view and is easy to reach for operator convenience.

***2-YEAR COMMERCIAL
WARRANTY**
Details on request.



Meets ANSI specifications
B71.4-1990.

1. **16 HP Vanguard Engine:** air-cooled, overhead valves, gasoline, twin cylinder, aluminum alloy with cast-iron sleeves.
2. **Pressure-Sensitive Handle Mechanisms** provide independent wheel control and enable you to maneuver as well as change from forward to reverse without shifting gears with speeds from 0-5.4 mph.
3. **All Controls** are located for operator convenience.
4. **Wide Wheel Spacing** gives better stability on hills.
5. **Deck Height** is easily adjustable from 1" to 4" (2.5 to 10 cm) in 1/4" (0.64 cm) increments. No tools required for adjustment.
6. **Interlock System** prevents engine from being started with either mower or transmission engaged. Reverse control must be continuously engaged for operation. Complies with safety standards.
7. **Mechanical PTO Clutch** requires less maintenance and provides longer life. V-belt clutching element easily replaced.
8. **Large Front Pneumatic Caster Wheels** provide longer life and absorb shock.
9. **Big 3.5 Gallon Gas Tank** means long running time between stops.
10. **Operator Presence Controls** allow mowing only when the operator is in position. Allows one-hand operation for hillsides and quick tight turns.
11. **1" Mower Spindles** are greaseable from top of mower. Tapered roller bearings. Cast-iron housing.
12. **Oil Reservoir** with cooler coils lowers the transmission operating temperature for increased life.
13. **Hydrostatic Drive System** for quicker response and better maneuverability.

GRAVELY PRO SERIES

The Pro Series has been engineered to make mowing quicker and easier, while still giving you the long-lasting dependability that comes with every Gravely commercial mower.

Mother Nature may not be too concerned about you getting the job done, but we are. That's why we built the Gravely Pro 150 and Pro 200 with dual drive belts to help you weather even the roughest conditions. And the durability continues through the 300 Series for power and convenience. Preferred by professionals, Gravely gets the job done. Quicker and easier.



Pro 150/36" Mower



Pro 200/50" Mower



Pro 300/50" Mower

PRO 150 SERIES POWER UNITS

		150 SERIES	PRO - 12.5 HP Kawasaki	12.5 HP @ 3600 RPM					
		150 SERIES	PRO - 12.5 HP Kohler	12.5 HP @ 3600 RPM					
		150 SERIES	PRO - 14 HP Kawasaki	14 HP @ 3600 RPM					
		150 SERIES	PRO - 15 HP Kohler	15 HP @ 3600 RPM					
E N G I N E S									
Kawasaki, air-cooled, gasoline, four cycle, single cylinder, engine governed @ 3300 RPM, vertical crankshaft.									
Kohler Command, air-cooled, gasoline, four cycle, overhead valve, single cylinder, engine governed @ 3300 RPM, vertical crankshaft.									
Kawasaki, air-cooled, gasoline, four cycle, overhead valve, single cylinder, engine governed @ 3300 RPM, vertical crankshaft.									
LUBRICATION	Full pressure lubrication with full-flow oil filter.								
AIR CLEANER	Dual-element air filter with pre-cleaner.								
FUEL SYSTEM	Gravity feed.								
ELECTRICAL SYSTEM	Manual recoil start with electronic ignition. Key ignition switch with safety interlock switches on PTO and transmission, and operator presence controls on handlebars.								
TRANSMISSION	Peerless 700-032.								
SPEEDS	5 forward and 1 reverse assist.								
SPEED RANGE	First-2.0 mph (3.2 kmph), Second-2.6 mph (4.2 kmph), Third-3.4 mph (5.5 kmph), Fourth-4.1 mph (6.5 kmph), Fifth-5.2 mph (8.4 kmph), Reverse-3.0 mph (4.9 kmph).								
BRAKES	Individual band type wheel brakes (6" diameter).								
STEERING	Individual clutch/brake lever for drive wheels (Dual drive belts to wheels).								
ATTACHMENT PTO	Belt-activated clutch.								
TIRES	13 x 6.00-6 Turf Tread.								
FUEL CAPACITY	3.5 gallons (13.3 liters).								
OIL CAPACITY	Engine: 3 pints (1.4 liters). Transmission: 18 ounces (0.53 liters).								
	Engine: 4 pints (1.9 liters). Transmission: 18 ounces (0.53 liters).								
WEIGHT	210 lb (95.1 kg).								
	232 lb (105.1 kg).								
	268 lb (121.6 kg).								
DIMENSIONS	Length: 38.3" (97.3 cm). Width: 32.8" (83.3 cm). Height: 39" (99.1 cm).								

PRO 150 SERIES MOWER DECKS



1" Mower Spindles are greaseable from top of mower and have tapered roller bearings.

		50" Pro Mower Deck - Stamped			
		36" Pro Mower Deck			
SIZE	36" (91.4 cm).				
	50" (127 cm).				
CUTTING HEIGHT	1" (2.50 cm) to 4" (10.2 cm), in 1/4" (0.64 cm) increments.				
GAUGE	7 Ga.				
	12 Ga.				
BLADES	Two: 18" (46 cm) long.				
	Three: 17" (43.2 cm) long.				
SPINDLE ASSEMBLIES	1" (2.54 cm) diameter shaft. Tapered roller bearings can be greased from top of mower.				
DISCHARGE	Right side.				
DRIVE	"A" section belt.				
GAUGE WHEELS	9 x 3.5-4 pneumatic, 4 ply, tubeless with tire sealant.				
WEIGHT (OVERALL)	186 lb (84.4 kg).				
	215 lb (97.5 kg).				
DIMENSIONS	Length: 35.4" (89.9 cm). Width: 36.4" (92.5 cm). Width of cut: 35" (89 cm). Height overall: 13.5" (34.3 cm).				
	Length: 28.6" (72.6 cm). Width: 53.3" (135.4 cm). Width of cut: 50" (127 cm). Height overall: 13.5" (34.3 cm).				
MULCHING KITS	Optional.				

PRO 200 SERIES POWER UNITS

		200 SERIES	PRO - 15 HP Kohler Command	15 HP @ 3600 RPM			
		200 SERIES	PRO - 16 HP Briggs & Stratton	16 HP @ 3600 RPM			
		200 SERIES	PRO - 18 HP Kohler Command	18 HP @ 3600 RPM			
		E N G I N E S					
Kohler Command, air-cooled, gasoline, four cycle, overhead valve, single cylinder, engine governed @ 3300 RPM, vertical crankshaft.							●
Vanguard, air-cooled, gasoline, four cycle, overhead valve, twin cylinder, engine governed @ 3300 RPM, aluminum alloy with cast-iron sleeves.						●	
Kohler Command, air-cooled, gasoline, four cycle, twin cylinder, engine governed @ 3300 RPM, vertical crankshaft with cast-iron liners.					●		
LUBRICATION	Full pressure lubrication with full-flow oil filter.				●	●	●
AIR CLEANER	Dual-element air filter with pre-cleaner.				●	●	●
FUEL SYSTEM	Gravity feed.						●
ELECTRICAL SYSTEM	Diaphragm-type pulse pump.				●	●	
	Manual recoil start with electronic ignition. Key ignition switch with safety interlock switches on PTO and transmission, and operator presence controls on handlebars.						●
	12-volt battery, ignition key and solenoid with safety interlock and operator presence controls on handlebars. Ignition: Inductive electronic, electric start. Charging System: 16-amp. alternator					●	
TRANSMISSION	12-volt battery, key ignition with safety interlock switches and operator presence controls on handlebars. Ignition: Electronic. Charging System: 15-amp.				●		
	Peerless 700-008.				●	●	●
SPEEDS	5 forward and 1 reverse.				●	●	●
SPEED RANGE	First-1.5 mph (2.5 kmph), Second-2.4 mph (3.8 kmph), Third-3.6 mph (5.7 kmph), Fourth-4.5 mph (7.3 kmph), Fifth-5.4 mph (8.6 kmph), Reverse-1.8 mph (2.9 kmph).				●	●	●
BRAKES	Individual band type wheel brakes (6" diameter).				●	●	●
STEERING	Individual clutch/brake lever for drive wheels (Dual drive belts to wheels).				●	●	●
ATTACHMENT PTO	Split-sheave, belt-activated clutch.				●	●	●
TIRES	13 x 6.50-6 Turf Tread.				●	●	●
FUEL CAPACITY	3.5 gallons (13.3 liters).				●	●	●
OIL CAPACITY	Engine: 4 pints (1.9 liters). Transmission: 18 ounces (0.53 liters).				●	●	●
WEIGHT	307 lb (139.3 kg).						●
	318 lb (144.5 kg).					●	
	310 lb (140.6 kg).				●		
DIMENSIONS	Length: 39.8" (101.1 cm). Width: 37.6" (95.5 cm). Height: 39" (99.1 cm).				●	●	●

PRO 200 SERIES MOWER DECKS



1" Mower Spindles are greaseable from top of mower and have tapered roller bearings.

		36" Pro Mower Deck	40" Pro Mower Deck	50" Pro Mower Deck - Fabricated	50" Pro Floating Mower Deck	60" Pro Mower Deck				
SIZE	36" (91.4 cm).	●								
	40" (102 cm).		●							
	50" (127 cm).			●	●					
	60" (152 cm).					●				
CUTTING HEIGHT	1" (2.5 cm) to 4" (10.2 cm), in 1/4" (0.64 cm) increments.	●	●	●	●	●				
	1" (2.5 cm) to 5" (12.5 cm), in 1/2" (1.28 cm) increments.						●			
	1-3/4" (4.5 cm) to 4-3/4" (12.1 cm), in 1/4" (0.64 cm) increments.							●		
GAUGE	7 Ga.	●								
	10 Ga.		●	●	●	●				
	11 Ga.						●	●		
BLADES	Two: 18" (46 cm) long.	●								
	Two: 20.5" (52 cm) long.		●	●	●	●				
	Three: 17" (43.2 cm) long.						●	●		
	Three: 20.5" (52 cm) long.								●	
SPINDLE ASSEMBLIES	1" (2.54 cm) diameter shaft. Tapered roller bearings can be greased from top of mower.	●	●	●	●	●				
	Multi-Mode. Rear or right side.	●								
DISCHARGE	Right side or rear left side.		●	●	●	●				
	Right side.						●	●	●	
DRIVE	"A" section belt.	●	●	●	●	●				
GAUGE WHEELS	9 x 3.5-4 pneumatic, 4 ply, tubeless with tire sealant.	●	●	●	●	●				
WEIGHT (OVERALL)	184 lb (83.5 kg).		●	●	●	●				
	210 lb (95.3 kg).	●								
	225 lb (102 kg).						●			
	261 lb (118.4 kg).							●		
	297 lb (134.7 kg).								●	
DIMENSIONS	Length: 36.4" (92.5 cm). Width: 36.4" (92.5 cm). Width of cut: 35" (89 cm). Height overall: 13.5" (34.3 cm).	●								
	Length: 38.9" (98.8 cm). Width: 42.1" (106.9 cm). Width of cut: 40" (102 cm). Height overall: 13.5" (34.3 cm).		●							
	Length: 36.5" (92.7 cm). Width: 52.5" (133.4 cm). Width of cut: 50" (127 cm). Height overall: 13.5" (34.3 cm).			●	●					
	Length: 31.8" (80.8 cm). Width: 64.3" (163.3 cm). Width of cut: 60" (152 cm). Height overall: 13.5" (34.3 cm).					●	●	●		
MULCHING KITS	Optional.	●	●	●	●	●				

PRO 300 SERIES POWER UNITS

300 SERIES		PRO - 16 HP Briggs & Stratton	16 HP @ 3600 RPM
300 SERIES		PRO - 20 HP Kohler Command	20 HP @ 3600 RPM
E N G I N E S			
Vanguard, air-cooled, gasoline, four cycle, overhead valve, twin cylinder, engine governed @ 3300 RPM, aluminum alloy with cast-iron sleeves.			•
Kohler Command, air-cooled, gasoline, four cycle, overhead valve, twin cylinder, engine governed @ 3300 RPM, aluminum head and crankcase with cast-iron liners.			•
LUBRICATION	Full pressure lubrication with full-flow filter.		•
AIR CLEANER	Dual-element air filter with pre-cleaner.		•
FUEL SYSTEM	Diaphragm-type pulse pump.		•
ELECTRICAL SYSTEM	12-volt battery, ignition key and solenoid with safety interlock and operator presence controls on handlebars. Ignition: Inductive electronic, electric start. Charging System: 16-amp alternator.		•
	12-volt battery, ignition key with safety interlock switches on PTO and transmission, and operator presence controls on handlebars. Ignition: Electronic. Charging System: 15-amp.		•
TRANSMISSION	Hydrostatic drive system. 2 cast-iron wheel drive motors, 2 Sundstrand variable displacement pumps.		•
SPEEDS	Variable speed selection forward and reverse.		•
SPEED RANGE	Forward 0-5.4 mph (0-8.7 kmph). Reverse 0-1.5 mph (0-2.4 kmph).		•
BRAKES	Hydrostatic-dynamic braking.		•
STEERING	Individual steering/speed control lever for each wheel.		•
ATTACHMENT PTO	Split-sheave, belt-activated clutch.		•
TIRES	16 x 6.50 - Turf Tread.		•
FUEL CAPACITY	3.5 gallons (13.3 liters).		•
OIL CAPACITY	Engine: 3 pints (1.4 liters). Transmission: 18 ounces (.53 liters).		•
WEIGHT	375 lb (170.1 kg).		•
	393 lb (178.3 kg).		•
DIMENSIONS	Length: 39.8" (101.1 cm). Width: 37.6" (95.5 cm). Height: 39" (99.1 cm).		•

PRO 300 SERIES MOWER DECKS



1" Mower Spindles are greaseable from top of mower and have tapered roller bearings.

60" Pro Mower Deck	
50" Pro Floating Mower Deck	
50" Pro Mower Deck – Fabricated	
40" Pro Mower Deck	
36" Pro Mower Deck	
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•
	•



Success Rides on a Gravelly.™ 

GRAVELLY FINANCIAL SERVICES

Gravelly offers two easy ways to obtain your equipment.

Easy Leasing

The Gravelly Four Seasons commercial leasing program is available from your local Gravelly dealer.

- Competitive leasing rates

Easy Financing

Gravelly's Four Seasons Financing Plan makes it easy for qualified customers to own Gravelly precision-engineered grounds care equipment.

- Competitive rates • Quick approval

Available at participating U.S. dealers only. Maximum 18% Annual Percentage Rate. Minimum down payment may be required.

Details of the Limited Warranty are available on request.

To continue its program of quality and design improvement, the manufacturer reserves the right to change specifications, designs, and prices without notice and without incurring obligations.

GRAVELLY LIMITED WARRANTY

Gravelly International issues a Limited Warranty on all new Gravelly equipment as follows:

MODEL	CONSUMER USE	COMMERCIAL USE
Professional Two-Wheel Series	5 years	2 years
Professional-G Series	5 years	2 years
Pro Series	2 years	2 years
PROMASTER Series	2 years	2 years
Pro Aire Series	2 years	1 year 90 days - Rental
Pro Chip & Pro Vac	1 year	1 year 90 days - Rental

©1997 Gravelly International



Gravelly International, 655 W. Ryan Street, Brillion, WI 54110 • 1-800-GRAVELLY (1-800-472-8359) • <http://www.gravelly.com>
Form #000 27897, Printed in USA 1/97