

# ARPS

LANDSCAPING / MAINTENANCE


## MINI-BLADES & MINI-RAKES

FOR YOUR COMPACT TRACTOR




SAVE HOURS OF  
BACK-BREAKING WORK  
THE YEAR AROUND


**DIRT MOVING**

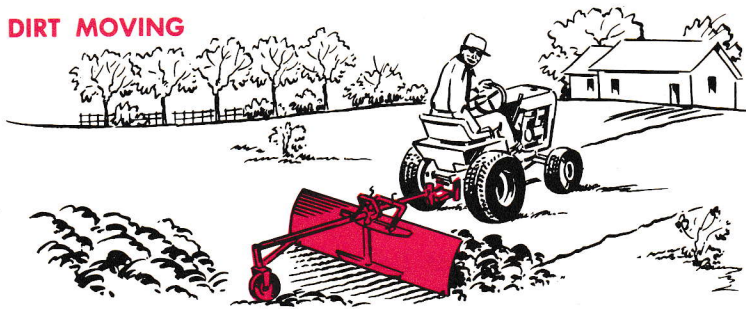


**GRADING**

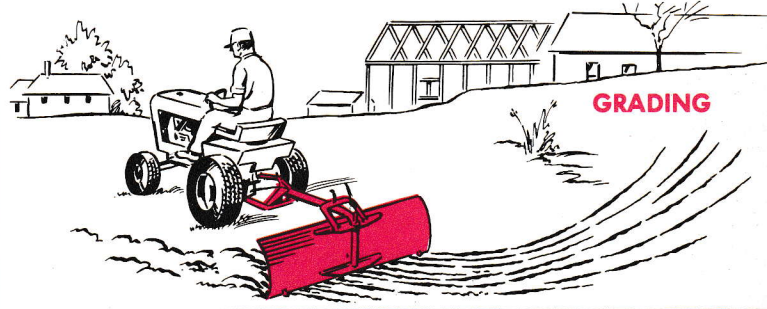

**BACK FILLING**

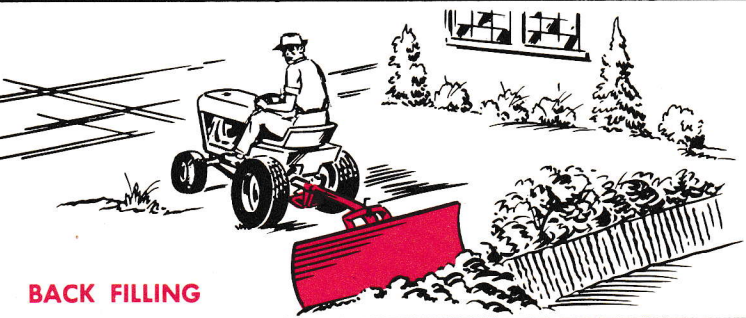


**SNOW REMOVAL**

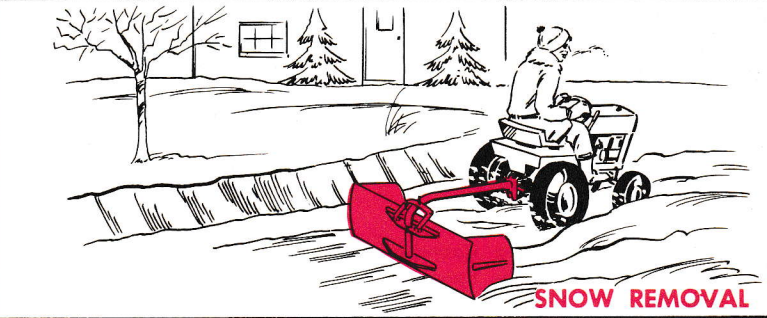


**LAND CLEARING**




**MAINTAINING  
GRAVEL DRIVES**

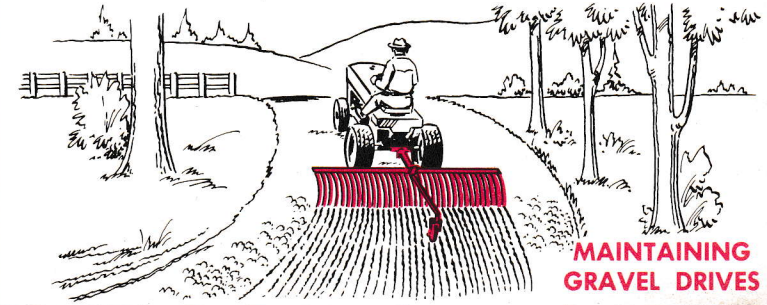

# ARPS MINI-BLADE

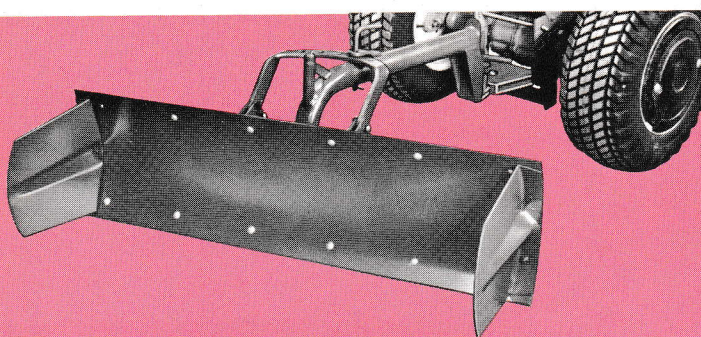

Blade turned for pushing to the rear. Note side plates to increase blade capacity.

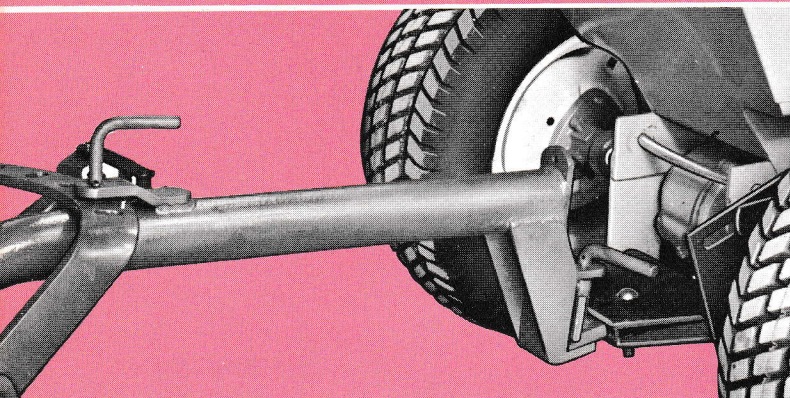


Slot-type, single-point hitch

- Tough, carbon steel construction; moldboard curved for best dirt rolling action.
- Strong, tubular steel welded frame; blade reinforced to resist twisting.
- Easily set at five different angles for both forward and rearward operation.
- Blade may be offset to the side to extend beyond the tractor wheels.
- Blade is reversible for long, double-duty cutting life. Equipped with skid shoes.
- Available with 3-point hitch, drawbar slot-type hitch, and drawbar socket-type hitch.


## SPECIFICATIONS

Moldboard Height	13"	
Moldboard Length	4'	
Moldboard Thickness	3/16"	
Radius of Moldboard Curvature	12"	
No. of Angle Positions, Forward and Rear Travel	5	
Offset	8-1/2"	
Weight (Approx.)	85 lbs.	
Accessories Available		Side Plates, Single Gauge Wheel

# ARPS MINI-RAKE

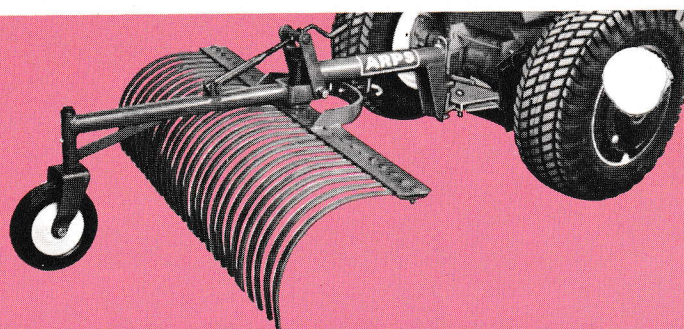

Easily adjustable, optional, gauge wheel keeps rake at exact height necessary for the job. Slot-type hitch.

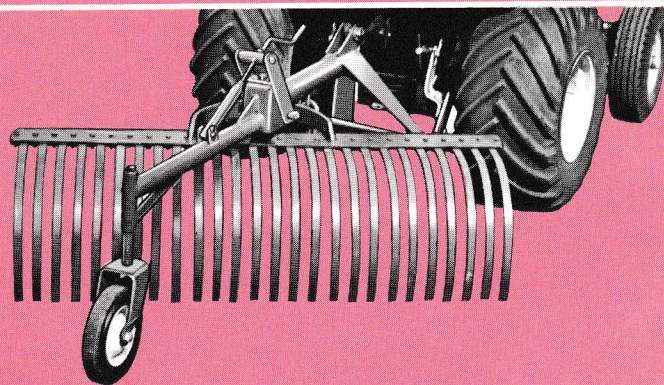

Material is discharged to either side after simple angle adjustment. Three point hitch.

- Choice of two lengths: 4' with 26 spring steel teeth; 6' with 40 teeth.
- Spring steel "fingers" really work the soil during lawn building, landscaping . . . ideal for clearing brush, stones, roots, debris . . . spread topsoil, distribute crushed stone, maintain beaches.
- Handy, optional gauge wheel controls depth penetration to provide a level finish.
- Rake can be set at five different angles making it easy to windrow cleared material, then set at right angles to the row for gathering into easily disposable piles.

## SPECIFICATIONS

Rake Lengths	4' and 6'
Distance Between Rake Teeth	1"
No. of Angle Positions	5
Hitches	3-point Drawbar Slot Drawbar Socket
Weight (Approx.) 4' rake	75 lbs.
Available Accessories	Single Gauge Wheel

**NOTE:** Method of attachment and operation of the Arps Mini-Blade and Mini-Rake are accepted by most compact tractor manufacturers and will not affect the tractor warranty. Warranty and performance of the Blade and Rake are the responsibilities of the Arps Corporation.



# ARPS CORPORATION

NEW HOLSTEIN, WISCONSIN 53061

(A Chromalloy American Subsidiary)

A Leading Supplier of Tractor Equipment Since 1920