

ROXY


FOR LAWSHEAR BEAUTY

REEL MOWERS ARE SAFER

Steel Rollers make the difference


QUALITY FEATURES

- A - REEL - 6 $\frac{3}{4}$ " diameter, heavy $\frac{3}{4}$ " diameter shaft, mounted on sealed ball bearings.
- B - BLADES - 5 sturdy high carbon spring steel blades, riveted to four steel spiders.
- C - BED KNIFE - sturdy, replaceable, high carbon spring steel.
- D - TIRES - semi-pneumatic, 10" diameter, 3 $\frac{1}{4}$ " wide, from our own molds, with curved surface, which flex evenly on ground contact, keeping turf damage to a minimum, heavier to take rough treatment.
- E - SIDE PLATES - heavily reinforced.

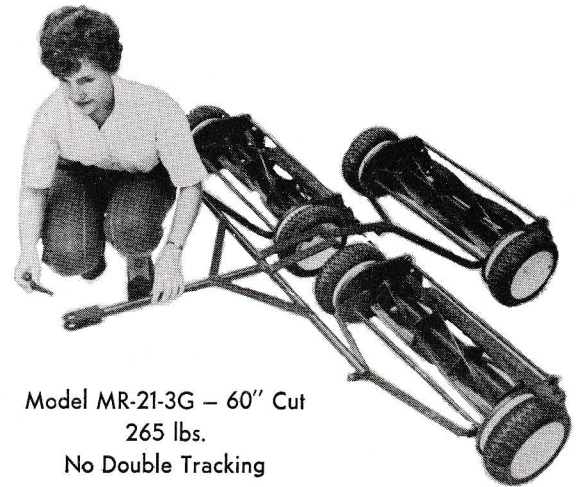


Model MR-21-3G - 60" Cut
265 lbs.
No Double Tracking


- F - ADJUSTMENTS - of bed knife from above, by cadmium plated screws which prevent rust. These are locked in place by lock nuts, easily reached by means of an exclusive easy access slot.
 - G - HEIGHT OF CUT - adjustable from $\frac{5}{8}$ " to 2 $\frac{1}{8}$ ", shipped at 1 $\frac{1}{4}$ ".
 - H - ROLLER - heavy steel, 2" outside diameter, mounted on rust-proof ball bearings which are renewable.
- SPEED - 3 to 6 m. p. h., can go faster, but 4 m. p. h. is best.

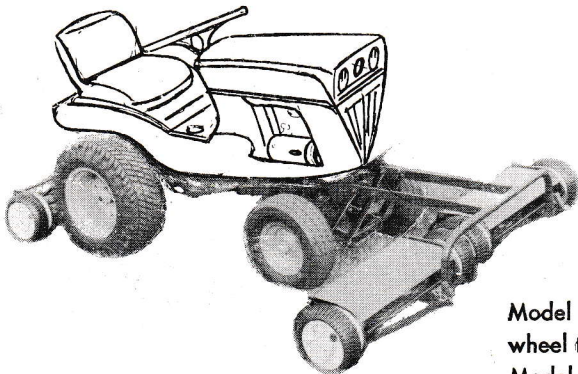

Model UM21-3W cuts 56" and exclusive Roxy Mounting minimizes wheel tracks. Approved for lawn and garden tractors. Specify Tractor Model when ordering.

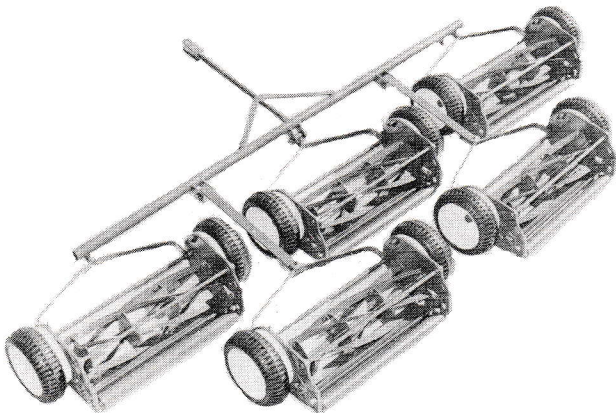

MR21-5G cutting 96" 465 lbs. The #6600 Hitch used here can also be used in the rear with UM21-3W shown above plus two MR21-1G Mowers to cut 90"

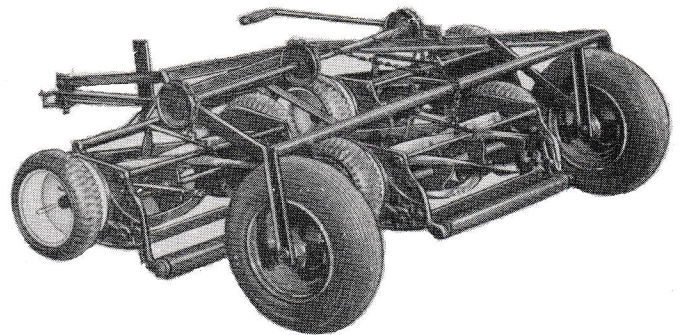

No. 21T Transport takes No. MR21-3G Mower to another job. Mower Reels do not rotate during transport - this prevents heating and distortion. Frame gives about 5" clearance and stores in upright position to save space.

MFG. BY **ROXY-BONNER, INC.**


2000 PIONEER ROAD, HUNTINGDON VALLEY, PENNSYLVANIA, 19006 - 215-675-6869

ROXY


FOR LAWSHEAR BEAUTY

LARGER GANGS

The 25" and 28" mower units are about 50% heavier than the 21" units. They are designed for larger areas — estates, schools, institutions and driving ranges. For continuous operation we recommend the 30" Ideal Mower. About 3½ times as heavy.

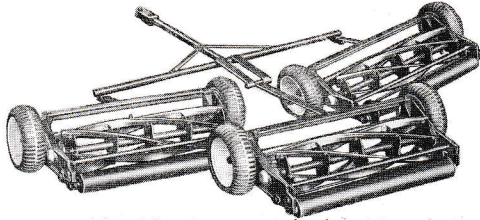


Cuts an acre in 20 minutes with the 80 inch Model 1000-3G or in 25 minutes with the 72 inch Model 100-3G (shown). Larger unit has seven spiders per reel for extra support rather than five. Other features are the same, including cast iron wheels with reinforcing ribs, positive power chain drive, and Zerk and oil cup fittings.

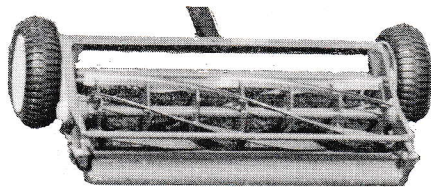


ABOVE: 1000-1W single 28" cut mower with #6635 hitch. See Quality Features.

AVAILABLE WITH FRAME FOR HYDRAULIC LIFT on Tractors with 3 Point Lift 100A-3FW or as Under Mounts

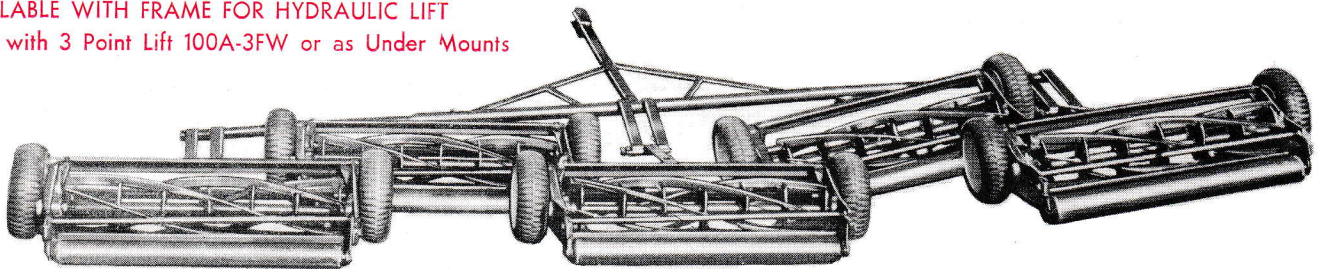


Mow 11 feet in one pass with the Model 1000-5G. Two outer units are easily removed for maneuvering in narrow places or for storage. Merely take out one bolt to detach each unit. Three gang Model 1000-3GH can also be converted from 80-inch cut to 132 inches by adding two more units.

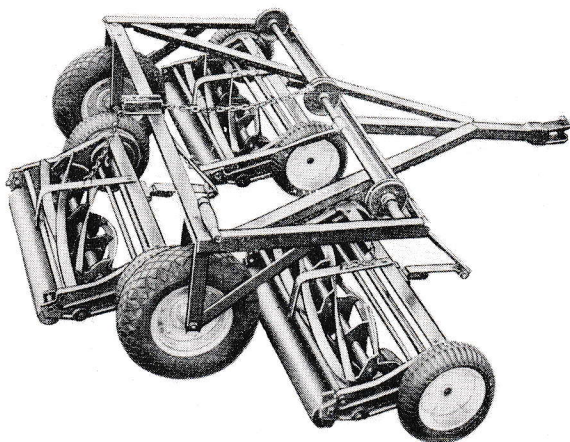

LEFT — Model 100A-3TW Transport Mower with hand lift clears ground by 5 inches. Trailer frame can mount platform to haul plants, tools and supplies. Cutting width: 72". Weight: 555 lbs. Also available with hydraulic jack lift - Model 100A-3TJ, or with cylinder lift complete with hoses - Model 100A-3TH, similar to model shown below.

BELOW — Model 100A-5TH Transport Mower with hydraulic cylinder and hoses for easy lifting from tractor seat for Hydrostatic Tractor equipped with rear hose connections. Cuts 118". Ideal for estates and institutions.

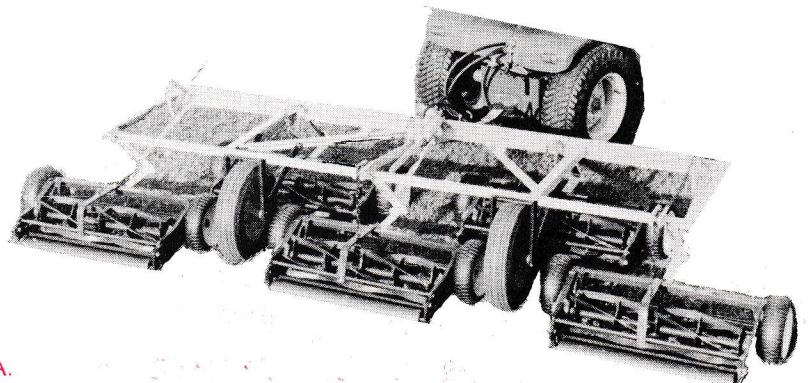

QUALITY FEATURES

- A — REEL — 6¾" dia. Timken tapered bearings on 1" dia. shaft. Adjust for end play.
 - B — BLADES — 5 sturdy high carbon spring steel, resting on notches, riveted to 5 steel spiders. 7 spiders on 28" unit.
 - C — BED KNIFE of strong high carbon spring steel.
 - D — TIRES are semi-pneumatic, 10" x 3¼", from our own molds. Curved surfaces flex evenly on ground contact, keeping turf damage to a minimum.
 - E — SIDE PLATE of heavily reinforced cast iron.
 - F — ADJUSTMENT of bed knife by exclusive easy access slot to lock nuts on rust-proof cad-plated screws.
 - G — HEIGHT of cut, adjustable — ½" to 1¾".
 - H — ROLLER of heavy steel, 2⅞" outside dia., on renewable, rust-proof ball bearings.
- PAWLS — Two sets of 3 engage notches on each side of sprocket and drive # 35 roller chain. Special hardened sprocket on reel shaft.
- SPEED — 4 to 8 m.p.h. — 5 to 6 best.
- HITCH is designed to get maximum traction from heavy unit.

Manufactured by
ROXY-BONNER, INC. (215-675-6869)
2000 Pioneer Road, Huntingdon Valley, Penna., 19006