

Tractors without 14712E1 (Liftable) Rear Hitch

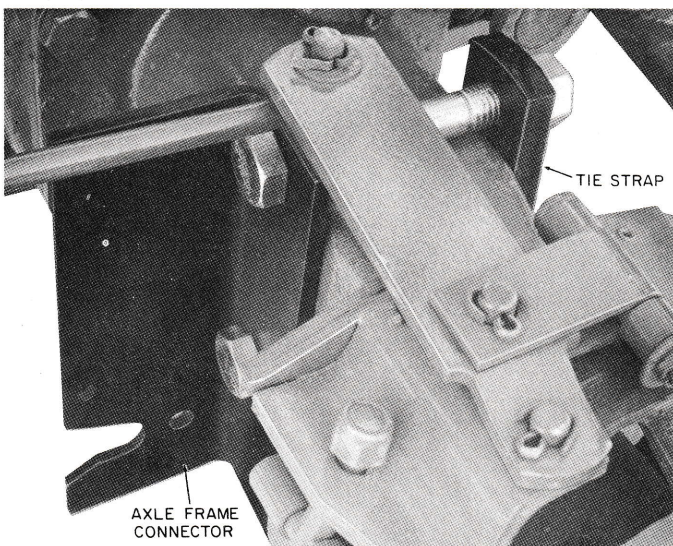


Figure 1

The axle frame connector mounts around the rear axle housing using four bolts, lockwashers and nuts and two tiestraps. The bar of the axle frame connector goes in front of and below chassis casting. See Figure 1.

450 or tractors with 14712E1 (Liftable) Rear Hitch

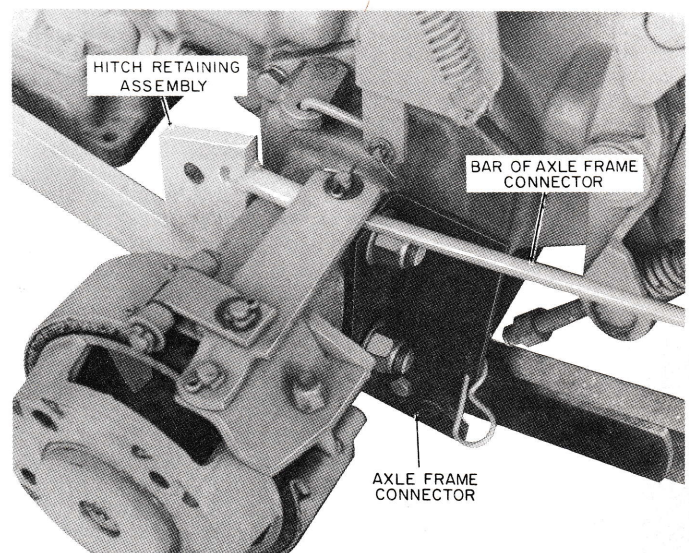


Figure 2

Remove nuts, washers and tiestraps from the hitch retaining assemblies. Replace the tiestraps with the axle frame connector. The bar of the axle frame connector goes in front of and below the chassis casting. Secure in place with washers and nuts. See Figure 2.